

MINI LIMISTAT

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for the measurement of pressure and temperature.



Applications

- Railways
- Machine tools
- HVAC
- Refrigeration
- Process technology

Features

- External or internal resetting
- Short response time
- Protection IP54
- Electrical connection on terminal screw

Technical Data

Designation of application	Remote sensing thermostat with limiter	Switching differential	Not adjustable
Measuring range	-30 ... +40 to +70 ... +350°C	Repeatability	± 0.5 % FS typ.
Output signal	Floating change-over contact	Approval	EN60730-1/ EN60730-2-9: Typ 2.B.H


05/2015
Data sheet H72173g

Subject to change



Standard products (extra short lead time)

Product No.	Type Code	Sensor material	Temperature range [°C]	Sensor max. [°C]
MS95R	632 1220 322 19	Cu	+5 ... +95	105
MS150R	632 1231 322 19	Cu	+20 ... +150	165
MS230SR	632 1224 121 19	1.4435/316L	+20 ... +230	250
MS350SR	632 1254 121 19	1.4435/316L	+70 ... +350	380



Dimensions



630.12XX.XXX.19...



632.12XX.XXX.19...

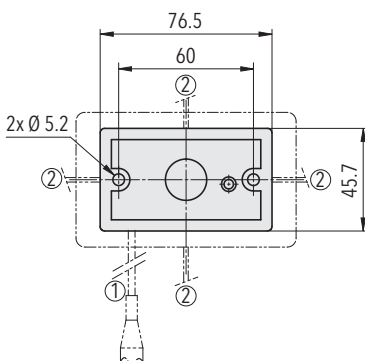

Fixation 19

Specifications		
Accuracy	Repeatability	$\pm 0.5 \% \text{ FS typ.}$
	Scale accuracy typ.	$\pm 2 \% \text{ FS typ.}$
	Switching differential	See table
	Switching point	Temperature compensated with bimetal switch lever
Environmental Conditions	Ambient temperature	Range $\leq +45^{\circ}\text{C}$: $-30...+50^{\circ}\text{C}$ Range $+45...+250^{\circ}\text{C}$: $-30...+70^{\circ}\text{C}$ Range $> +250^{\circ}\text{C}$: $-10...+70^{\circ}\text{C}$ (Important: Temperature at sensor may not exceed maximum sensor temperature)
	Storage temperature	Range $\leq +45^{\circ}\text{C}$: $-30...+50^{\circ}\text{C}$ Range $> +45^{\circ}\text{C}$: $-30...+85^{\circ}\text{C}$
	Protection	IP54
	Humidity	Max. 95 % relative
Mechanical Data	Housing	See ordering information
	Filling	Liquid
	Housing	PC/ABS-Blend V0
	Screwed cable gland	PA, Polyamid
	Installation	Any position
	Weight	$\sim 250 \text{ g}$
Microswitch	Rating	See table
	Resistance of insulation	$> 2 \text{ M}\Omega$
	Dielectric strength	2 kV terminal ground
	Life time (mechanical)	0.3 Mio. cycles
Electrical connection	Cable gland	M16x1.5 Cable- $\varnothing$ 4...9 mm
	Terminal screw	3 x 1...2.5 mm ²

Additional information		
Documents	Data sheet	www.trafag.com/H72173
	Instructions	www.trafag.com/H73624
	Flyer	www.trafag.com/H70956


Switching differential typ.

Range	[°C]	-30 ... +40 -10 ... +25 0 ... +35 +15 ... +30 +10 ... +45 +10 ... +80	-10 ... +35 -10 ... +80 +5 ... +95 +20 ... +110	+20 ... +150	+20 ... +230	+40 ... +300 +70 ... +350
Microswitch 12 Switching differential (fixed value, not adjustable)	[°C]	2.0	6.0	7.5	9.0	12.0

Electrical data switch

		Rating Resistive Load (Inductive Load)	
Type	Features	AC	DC
12	High vibration resistance, medium switching differential	125 V, 15 (1.5) A 250 V, 15 (1.25) A 500 V, 10 (0.75) A	250 V, 0.3 (0.2) A 125 V, 0.75 (0.4) A 30 V, 15 (1.5) A 14 V, 15 (1.5) A

Electrical Connection



630/632

Modifications

[illegible]