



# Data sheet

# **Pressure test valve** Type MBV 5000



The pressure test valve, type MBV 5000 is a part of the block concept which has been developed to save space, weight and costs. The test valve is intended for use in many applications, for example monitoring, alarm indication, shut-down, diagnosing on equipment such as motors, gears, thrusters, pumps, filters, compressors etc.

The block valve is designed in many different configurations for use in the marine industry. The valve meets demands for fast installation, simple isolation and easy test pressure connection. In addition to the test valves the block concept consists of block pressure and temperature controls – type MBC, block pressure transmitters – type MBS and accessories.

The test valves meet the strict demands on marine equipment, including EU stipulations on such products.

#### Features

- Compact design
- Many configuration possibilities
- Low installation cost

- Fast and easy to operate
- Aluminum version suitable for liquid media only. Stainless steel version for liguid and air



# **Technical data**

Specification

and code numbers for standard types

#### Performance

Pressure	Operating pressure	0 — 180 bar 0 — 60 bar ¹)		
riessure	Burst pressure	720 bar 240 bar 1)		
Temperature	Operating temperature	-20 – 120 °C		
	Ambient temperature	-20 - 120 °C		
	Temperature of medium	-20 – 120 °C		

<sup>1</sup>) For 061B7055 MBV 5000-2211S only

#### Mechanical specification

	Housing	AW-6082T6 (AlMgSi1)
Material	Nipple	AW-6082T6 (AlMgSi1)
Material	Ball	stainless steel 1.4404
	Gasket	PEEK/FPM
	Housing	stainless steel 1.4401
Material for stainless steel version	Nipple	stainless steel 1.4401
Material for stainless steel version	Ball	stainless steel 1.4404
	Gasket	PEEK/FPM
Pressure connection	Input	G <sup>1</sup> / <sub>4</sub>
	Output	Flange / M5 x 8

Pressure connection:  $G_{1/4}$ . Test pressure connection:  $M16 \times 2$ 

Type no.	Compleal	Trues	Output no.	Weight	Length	Height [mm]	Width [mm]	Code no.
	Symbol	Туре		[kg]	[mm]			
MBV5000-1111	Output	1	x1	0.40	36	80	40	061B7000
MBV5000-1111S	<u> </u>	1	x1	0.85	36	80	40	061B7051
MBV5000-1211		1	x2	0.80	76	80	40	061B7001
MBV5000-1311		1	x3	1.20	116	80	40	061B7002
MBV5000-1411		1	x4	1.60	156	80	40	061B7003
MBV5000-1511	Input	1	x5	2.00	196	80	40	061B7004
MBV5000-2211	Output	2	x2	0.80	76	80	40	061B7005
MBV5000-22115		2	x2	2.00	76	80	40	061B7055
MBV5000-2311		2	x3	1.20	116	80	40	061B7006
MBV5000-2411		2	x4	1.60	156	80	40	061B7007
MBV5000-2511	Input	2	x5	2.00	196	80	40	061B7008
MBV5000-3211	Output	3	x2	0.70	76	80	40	061B7009
MBV5000-3311		3	x3	1.00	116	80	40	061B7010
MBV5000-3411		3	x4	1.30	156	80	40	061B7011
MBV5000-3511	Input	3	x5	1.60	196	80	40	061B7012

# $\diamondsuit$ Test pressure connection

Shut-off valve

Code numbers for

standard flange  $\rightarrow$  G <sup>1</sup>/<sub>8</sub> (aluminium) or G <sup>1</sup>/<sub>4</sub> (stainless steel)

## Aluminium adapters

Description	Code no.
Cover	061B720066
Angleway adapter	061B720166
Straightway adapter	061B720266

## Stainless steel adapters

Description	Code no.
Angleway adapter	061B721766
Straightway adapter	061B720866






# Ordering special versions

Type no: MBV 5000-	x	x	x	x	
				S x	6082 (AlMgSi1) version Stainless steel (1.4401) version Other
Type   Separate inputs and separate test functions   Common input and separate test functions   Common input and common test function   Other			1 2 x		Pressure connection G $\frac{1}{4}$ M10 × 1 Other
Number of outputs (n) 1 Output (only for type 1) 2 Outputs 3 Outputs 4 Outputs 5 Outputs Other	1 2 3 4 5 x	0 1 x			<b>Test pressure connection</b> Hole plug G <sup>1</sup> / <sub>4</sub> Pressure gauge connection M16 × 2 Other


#### **Dimensions** [mm]

#### Test valve

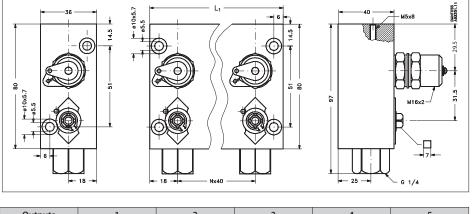


Outputs	1	2	3	4	5
L <sub>1</sub>	36	76	116	156	196

Adapters (aluminium version)

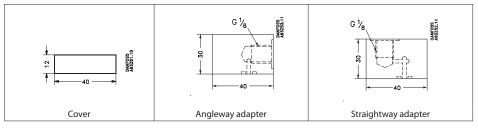

## Adapters (stainless steel version)

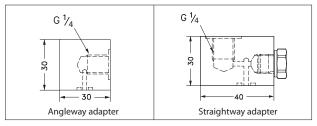

Danfoss can accept no responsibility for possible errors in catalogues, brochures and other printed material. Danfoss reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequential changes being necessary in specifications already agreed. All trademarks in this material are property of the respective companies. Danfoss and the Danfoss logotype are trademarks of Danfoss A/S. All rights reserved.