

series **K2E**



Our new K2E Indicator with LED display.



- LED Display.
- OIML-C3 load cells.
- Piece counting function.
- Tare function.
- Classification by weight (HI_OK_LO) function.
- Animals weighing function.
- Low battery indication.
- Internal Rechargeable battery.



Connectivity (optional)

Our indicator is available with the RS 232-C data output compatible with our printer or PC.


Available options

- Painted steel wall support
- PR3 Printer with cable
- Column support
- RS 232-C data output

Technical Specifications

Power: 220V
Battery: internal rechargeable 6V/4Ah
Operating temperature: -10°C / +40°C

External dimensions (mm)

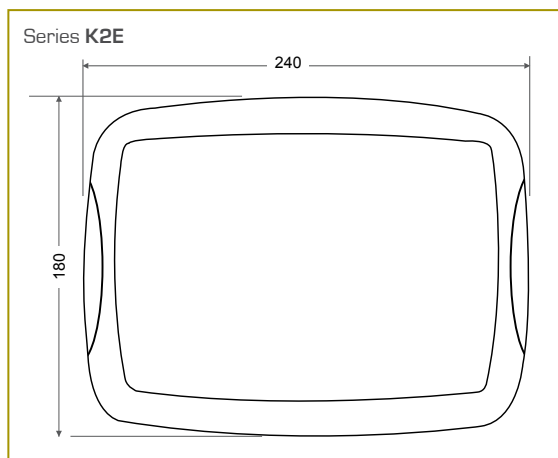

Technical characteristics

Model	K2E
Reference	60020
Internal division	600.000
Display	6 x 25 mm high digits. Red LED Display
Weight units	kg, lb
Tare	100%
Loadcells	4 x 350 OHM loadcells
Connectivity (optional)	RS 232 -C port
Structure material	ABS
External dimensions (mm)	240 x 180 x 105
Total net weight (kg)	1,380