

IO-LINK PRESSURE TRANSMITTER / SWITCH

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The NAI 8273 IO-Link pressure transmitter is designed as a smart sensor and provides application-relevant information in addition to the process data. The process data contains the pressure value and the media temperature, which is measured directly at the exceptionally long-term stable thin-film-on-steel pressure sensor cell. The small sensor dimension combined with the pressure and temperature value of the media make the NAI 8273 the ideal choice in various applications. For the conventional connection of the switching outputs, the polarity NPN and PNP is configurable.



Applications

- Machine tools
- Hydraulics
- Pneumatics
- Process technology

Features

- Pressure measuring accuracy 0.3 %, 0.5 %
- Media temperature measurement
- Communication via IO-Link 1.1 , COM3, Smart Sensor Profile ED2
- Sensor diagnostic functions
- 2 Switching outputs PNP/NPN configurable

Technical Data

Measuring principle	Thin-film-on-steel	Accuracy @ 25°C typ.	± 0.5 % FS typ. ± 0.3 % FS typ.
Measuring range	-0.2 ... 0.2 to 0 ... 700 bar	Media temperature	-40°C ... +125°C
Output signal	IO-Link 1.1 , COM3, Smart Sensor Profile ED2 2 Switching outputs PNP/NPN	Ambient temperature	-40°C ... +125°C
NLH @ 25°C (BSL) typ.	± 0.2 % FS typ.		

Data sheet H72621_2 02/2022

Subject to change

Ordering information/type code

8273 . XX							XX	XX	XX	XX	XX
Measuring range ¹⁾	Pressure measurement range [bar]	Over pressure [bar]	Burst pressure [bar]	Pressure measurement range [psi]	Over pressure [psi]	Burst pressure [psi]					
-0.2 ... 0.2 ¹⁰⁾	1.2	25	25	-2.9 ... 2.9	17.4	362	A8				
-0.4 ... 0 ¹⁰⁾	1.2	25	25	-5.8 ... 0	17.4	362	D3				
-0.4 ... 0.4 ¹⁰⁾	1.2	25	25	-5.8 ... 5.8	17.4	362	A9				
-1 ... 0 ¹⁰⁾	1.2	25	25	-14.5 ... 0	17.4	362	D4				
-1 ... 1.0 ¹⁰⁾	2	25	25	-14.5 ... 14.5	29	362	B1				
-1 ... 1.6 ¹⁰⁾	3.2	50	50	-14.5 ... 23.2	46.4	725	B3				
-1 ... 4	12	60	60	-14.5 ... 58	174	870	B6				
-1 ... 6	18	100	100	-14.5 ... 87	261	1450	B7				
-1 ... 10	30	200	200	-14.5 ... 145	435	2900	B8				
-1 ... 16	48	200	200	-14.5 ... 232	696	2900	B9				
-1 ... 25	75	300	300	-14.5 ... 362	1087	4351	C0				
0 ... 0.2 ¹⁰⁾	1.2	25	25	0 ... 2.9	17.4	362	68				
0 ... 0.4 ¹⁰⁾	1.2	25	25	0 ... 5.8	17.4	362	69				
0 ... 1 ¹⁰⁾	2	25	25	0 ... 14.5	29	362	71				
0 ... 2.5	7.5	60	60	0 ... 36	109	870	75				
0 ... 10	30	200	200	0 ... 145	435	2900	78				
0 ... 40	120	300	300	0 ... 580	1740	4351	81				
0 ... 60	180	400	400	0 ... 870	2610	5801	82				
0 ... 100	300	500	500	0 ... 1450	4351	7252	83				
0 ... 160	480	750	750	0 ... 2320	6962	10878	85				
0 ... 250	750	1000	1000	0 ... 3626	10878	14504	74				
0 ... 400	1000	2000	2000	0 ... 5801	14504	29007	84				
0 ... 600	1500	2500	2500	0 ... 8702	21755	36259	86				
0 ... 700	1500	2500	2500	0 ... 10152	21755	36259	87				
Option 5P: Fivefold overpressure											
0 ... 2.5	12.5	60	60	0 ... 36	181	870	55				
0 ... 4	20	100	100	0 ... 58	290	1450	56				
0 ... 6	30	200	200	0 ... 87	435	2900	57				
0 ... 10	50	200	200	0 ... 145	725	2900	58				
0 ... 16	80	300	300	0 ... 232	1160	4351	59				
0 ... 25	125	300	300	0 ... 362	1813	4351	60				
0 ... 40	200	400	400	0 ... 580	2900	5801	61				
0 ... 60	300	500	500	0 ... 870	4351	7252	62				
0 ... 100	500	750	750	0 ... 1450	7252	10878	63				
0 ... 160	800	1000	1000	0 ... 2320	11603	14504	65				
Sensor	Relative pressure, accuracy: 0.5 % ¹³⁾						25				
	Relative pressure, accuracy: 0.3 % ¹⁴⁾						23				
Pressure connection	G1/4" male, seal: DIN 3869 (accessory 61/63/83)	17		9/16"-18UNF male, SAE6 (J1926), seal: accessory 61	61						
	G1/4" male, with integrated damping Ø 0.5 mm, Seal: DIN 3869 (accessories 61/63/83)	15		R1/4" male, DIN3858	19						
	G1/4" male (Manometer) EN 837	53		R1/4" male, DIN2999 ⁹⁾	20						
	G1/8" male DIN3852-E, seal: accessory 61 ⁵⁾	54		R1/8" male, DIN3858 ⁵⁾	16						
	1/4" NPT male	30		M10x1 male, DIN EN ISO 6149-2, seal: accessory 61	32						
	1/8" NPT male ¹¹⁾	43		M12x1 male, seal: accessory 61 ¹²⁾	64						
	7/16"-20UNF female, SAE J512 with valve opener ⁴⁾	24		M12x1.25 male, seal: accessory 61 ¹²⁾	65						
	7/16"-20UNF female, SAE J512 without valve opener ⁴⁾	44		M12x1.5 male, DIN EN ISO 9974-2, seal: accessory 61	49						
	7/16"-20UNF male, DIN3866 ⁴⁾	18		M14x1.5 male DIN EN ISO 6149-2, seal: accessory 61 ⁹⁾	31						
	7/16"-20UNF SAE4 male (J1926), seal: accessory 61/63	42									

8273 . XX XX XX XX XX XX

Electrical connection	Male electrical connector M12x1, 4-pole, Mat. PA, IEC 61076-2-101	32					
Output signal	IO-Link	50					
Accessories	Female electrical plug M12x1, 5-pole ²⁾	33					
	Pressure peak damping element ø 1.0 mm ⁶⁾	40					
	Pressure peak damping element ø 0.4 mm ⁶⁾	44					
	Seal FPM, -18°C ... +125°C	61					
	Seal EPDM, -40°C ... +125°C	63					
	Seal NBR, -25°C ... +100°C	83					
	Standard electrical connection: Pin 1 L+, Pin 2 Out 2 I/Q, Pin 3 L-, Pin 4 Out 1 C/Q, for male electrical connector 32, M12x1, 4-pole)	0L					
	Parameterization according to customer specification (refer to the interface description)	ZC					
	Parameterization standard (refer to the interface description)	ZS					
	Multiple packaging ⁸⁾	VM					

¹⁾ Customized pressure ranges upon request

²⁾ For electrical connection 32

⁴⁾ Max. allowable pressure range 60 bar (870 psi at 180 bar (2610 psi) overpressure

⁵⁾ Max. allowable pressure range 160 bar (2320 psi at 480 bar (6961 psi) overpressure

⁶⁾ Not for pressure connections 53, 24, 44, 18

⁸⁾ The order quantity must be a multiple of 50, only for electrical connections 32

⁹⁾ Upon request

¹⁰⁾ Only for pressure accuracy 0.3 % ²³⁾

¹¹⁾ Max. allowable pressure range 400 bar (5800 psi) at 600 bar (8700 psi) overpressure

¹²⁾ Without seal, use seal geometry according DIN EN ISO 6149-2

¹³⁾ IO-Link process data includes the device temperature

¹⁴⁾ IO-Link process data includes the media temperature

preliminary

Specifications

Electrical Data	Output / supply voltage	Switching output PNP/NPN: 24 (9...32) VDC IO-Link: 24 (18...32) VDC
	Current consumption / power consumption ²⁾	< 0.5 W
	Power-on delay time	IO-Link readiness: 300ms Data readiness: ca. 700ms
	Inverse-polarity protection, short-circuit strength	IO-Link/Out 1 or Out 2: to $U_s = 32$ VDC
Environmental conditions	Media temperature	-40°C ... +125°C
	Ambient temperature	-40°C ... +125°C
	Protection ¹⁾	IP65, IP67
	Humidity	Max. 95 % relative
	Vibration	15 g RMS (20...2000 Hz) (EN60068-2-64) 25 g sin (80...2000 Hz), 1 oct./min, (1x @ 25°C) (EN60068-2-6)
	Shock	50 g / 11 ms 100 g / 6 ms (EN60068-2-27)
EMC Protection	Emission	EN/IEC 61000-6-3
	Immunity	EN/IEC 61000-6-2
Mechanical Data	Sensor (wetted parts)	1.4542 (AISI630)
	Pressure connection (wetted parts)	1.4542 (AISI630)
	Housing	1.4301 (AISI304)
	Sealing	See ordering information
	Male electrical connector	See ordering information
	Weight	appr. 50 g
	Mounting torque	25 Nm

¹⁾ See electrical connection


²⁾ Without load on the switching outputs

Pressure measurement accuracy


		Measuring accuracy 0.3 % Ordering No. 23			Measuring accuracy 0.5 % Ordering No. 25
Measuring range	[bar]	≥ 0.2 ≤ 0.6	> 0.6 < 2.0	≥ 2.0	≥ 2.5
	[psi]	≥ 2.9 ≤ 8.7	> 8.7 < 29	≥ 29	≥ 29
TEB @ -25°C ... +85°C	[% FS typ.]	± 2.0	± 1.5	± 1.0	± 1.75
Accuracy @ +25°C	[% FS typ.]	± 0.8	± 0.6	± 0.3	± 0.5
NLH @ +25°C (BSL)	[% FS typ.]	± 0.2	± 0.2	± 0.2	± 0.2
TC zero point and span	[% FS/K typ.]	± 0.02	± 0.02	± 0.01	± 0.03
Long term stability 1 year	[% FS typ.]	± 0.3	± 0.2	± 0.1	± 0.1
Mounting dependency with 180° rotation (vibration and shock)	[mbar]	0.5	0.5	0.5	0.5
Rise time	tbd				

Pressure accuracy class 0.3 %


$\geq 0.2 \text{ bar} \dots \leq 0.6 \text{ bar}$

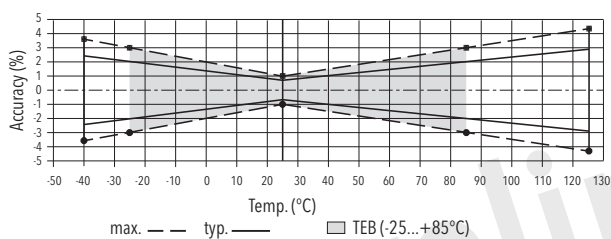


$> 0.6 \text{ bar} \dots < 2.0 \text{ bar}$

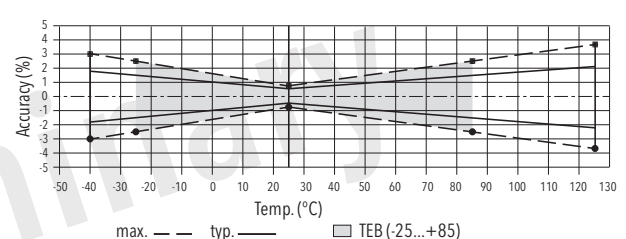

$\geq 2.0 \text{ bar}$

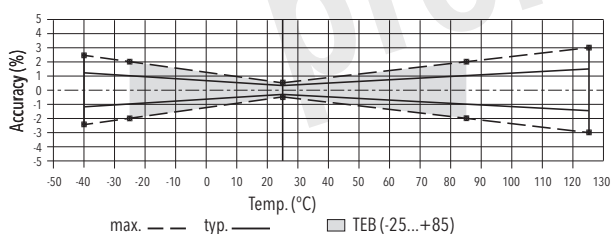

Pressure accuracy class 0.5 %

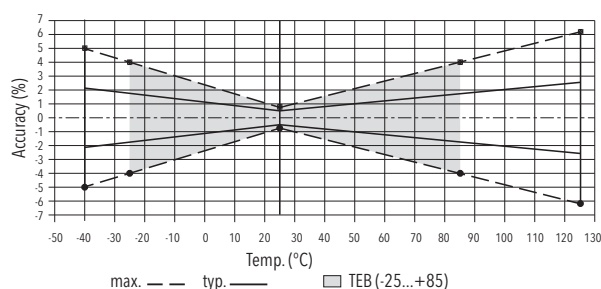

Media temperature measurement

Accuracy	Accuracy @ +25°C	°C	± 5.0
	Accuracy @ +85°C	°C	± 7.0
	Accuracy @ +125°C	°C	± 7.0
	Accuracy @ -40°C	°C	± 7.0
Temperature range		°C	-40°C ... 125°C

Internal temperature measurement


Accuracy	Accuracy @ 0°C ... +80°C	°C	± 1.5
Temperature range		°C	-40°C ... 125°C

Switching output


Accuracy	TEB @ -25°C ... +85°C	[% FS typ.]	± 1.0
	Accuracy @ +25°C	[% FS typ.]	± 0.3
	Long term stability 1 year	[% FS typ.]	± 0.1
Switching resistance	≤ 3 Ω		
Output polarity	PNP, NPN configurable		
Output function	Function modes: Single Point, Two Point, Window; normally closed (NO), normally open (NC); switch-on/switch-off delay; Damping; configurable via IO-Link interface		
Switching current	-40°C ... +85°C ambient temperature		100 mA
Current limiting	integrated		
Life time	>100 x 10 ⁶ cycles		
Switching frequency	tbd		

Interface		
Communication interface	SDCI standard IEC 61131-9	IO-Link
Transmission type		COM3 (230,4 kBaud)
IO-Link revision		V1.1
Profiles / funtion class		Identification and Diagnosis (0x4000), Measurement Data Channel (0x800A) Measuring and Switching Sensor (DMSS), SSP4.1.2
SIO mode		Yes
Required master port type		Class A
Min. process cycle time	[ms]	1
IO-Link resolution pressure	Refer to the interface description	
IO-Link resolution temperature	[K]	tbd
IO-Link process data (cyclical)	Pressure [Pa]	16 bit
	Switching signal for pressure	2 bit
	Temperature [°C]	16 bit device temperature with 0.5 % pressure accuracy media temperature with 0.3 % pressure accuracy
	Switching signal for temperature	2 bit
	Device status	4 bit
IO-Link functions (acyclical)	Application specific tag; media temperature, device temperature; operating hours counter; min./max. pressure value; min./max. temperature value; pressure overload counter; temperature overload counter	
Download the IO Device Description (IODD) from:		

Dimensions

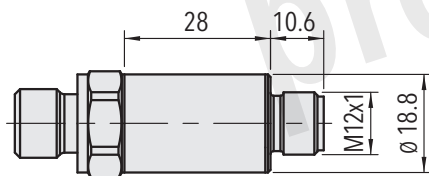


8273.XX.XXXX.32.XX.XX




8273.XX.XXXX.XX.XX.33


Dimensions




8273.XX.XX17.XX.XX.XX




8273.XX.XX15.XX.XX.XX




8273.XX.XX53.XX.XX.XX




8273.XX.XX54.XX.XX.XX




8273.XX.XX30.XX.XX.XX




8273.XX.XX43.XX.XX.XX




8273.XX.XX24.XX.XX.XX




8273.XX.XX44.XX.XX.XX




8273.XX.XX18.XX.XX.XX




8273.XX.XX42.XX.XX.XX




8273.XX.XX61.XX.XX.XX




8273.XX.XX19.XX.XX.XX




8273.XX.XX20.XX.XX.XX




8273.XX.XX16.XX.XX.XX




8273.XX.XX32.XX.XX.XX




8273.XX.XX64.XX.XX.XX



8273.XX.XX65.XX.XX.XX




8273.XX.XX49.XX.XX.XX



8273.XX.XX31.XX.XX.XX

Electrical connection

Protection / electrical connection	
Output signal	IP65, IP67 ^{1) 2)}
	M12x1 4-pole 32 
	0L 1 2 4 3

P / T

Out

⊕ L+ (pos. Supply) →

○ Out 2 : I/Q →

○ Out 1 : C/Q →


⊖ L- (neg. Supply) →

8273.XX.XXXX.XX.50


¹⁾ Provided female electrical plug is mounted according to instructions
²⁾ Ventilation via male electric plug

preliminary

Function modes for the switching signal

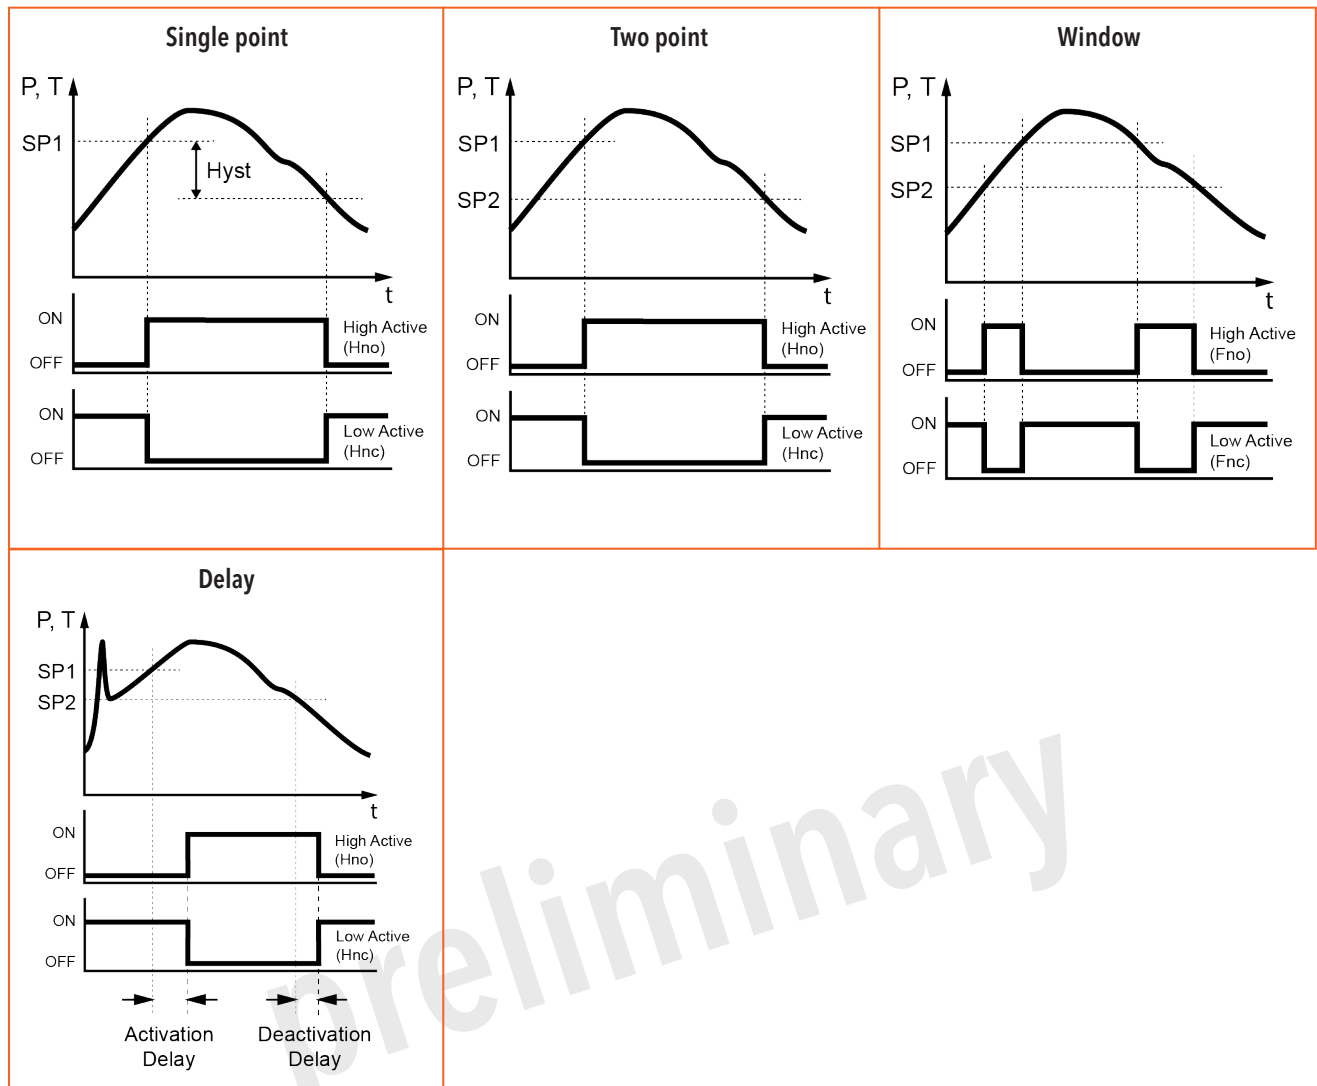

Switching output polarity

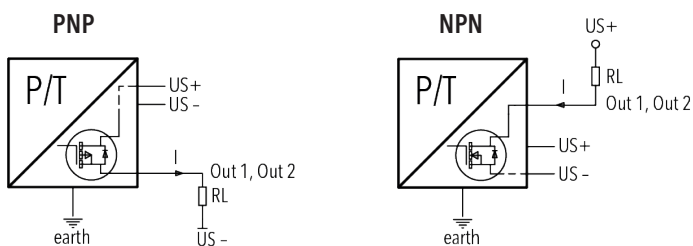

Connection of loads to switching output

Additional information

Documents

Data sheet	www.trafag.com/H72621
Instructions	www.trafag.com/H73621
Flyer	www.trafag.com/H70621
Interface description	www.trafag.com/H73664