

MPB SERIES TX50 TRANSMITTING FLOWMETER

GENERAL INFORMATION

The MPB Series TX50 Transmitting Flowmeter has been designed to meet demanding applications where a transmitted signal proportional to flow rate is required.

The TX50 Transmitting Flowmeter was developed from the FA50 Series Flow Alarm and incorporates the same features.

The TX50 Transmitting Flowmeter, whilst having a wide range of standard flow rates, can be used for almost any process liquid or gas. The materials of construction will assist the designer in selecting a compatible flow transmitter for the medium being processed.

The TX50 Transmitting Flowmeter is ideal for control requirements in the water, chemical and processing industries.

MPB SERIES TX50 FEATURES

- 4 – 20 mA TRANSMITTING SIGNAL OUTPUT
- EASILY ADJUSTABLE ZERO AND SPAN SETTINGS
- STANDARD AND CUSTOMIZED FLOW SCALES
- EASY IN-SITU TUBE REMOVAL
- RPVC, OR STAINLESS STEEL CONNECTIONS
- POLYCARBONATE SAFETY COVER
- DIRECT READING OF FLOW RATE
- MINIMAL MAINTENANCE




MPB SERIES TX50 TRANSMITTING FLOWMETER

Chassis:	White epoxy coated aluminium	Maximum Working Pressure:	Gas: 6 bar g (non-shock) Liquid: 10 bar g (non-shock)
Connections:	Rigid PVC (grey) 303 Stainless steel	Maximum Working Temperature:	60°C Nitrile 100°C Viton
Process Connections:	¼" BSPFF	Accuracy:	± 5% FSD standard ± 1% repeatability
Cover:	Polycarbonate	Connection:	2 metre flying lead
Seals:	Nitrile, Viton, EPDM, etc	Operating Voltage:	9VDC – 36VDC with reverse-voltage protection
Metering Tube:	Borosilicate glass	Output Current:	4 – 20 mA with zero and span adjustment
Scale:	Permanently fired black ceramic		
Float:	Rigid PVC, or 316 Stainless steel		
Weight:	550 grams (approx)		

STANDARD RANGES

AIR @ 1013 mbar abs 20°C	WATER @ 20°C
0.5 - 5 L/min	10 - 100cc/min
1 - 10 L/min	50 - 500cc/min
2.5 - 25 L/min	0.1 - 1 L/min
5 - 50 L/min	0.2 - 2 L/min
10 - 100 L/min	0.4 - 4 L/min
15 - 150 L/min	
0-100% Scales Available If Required	

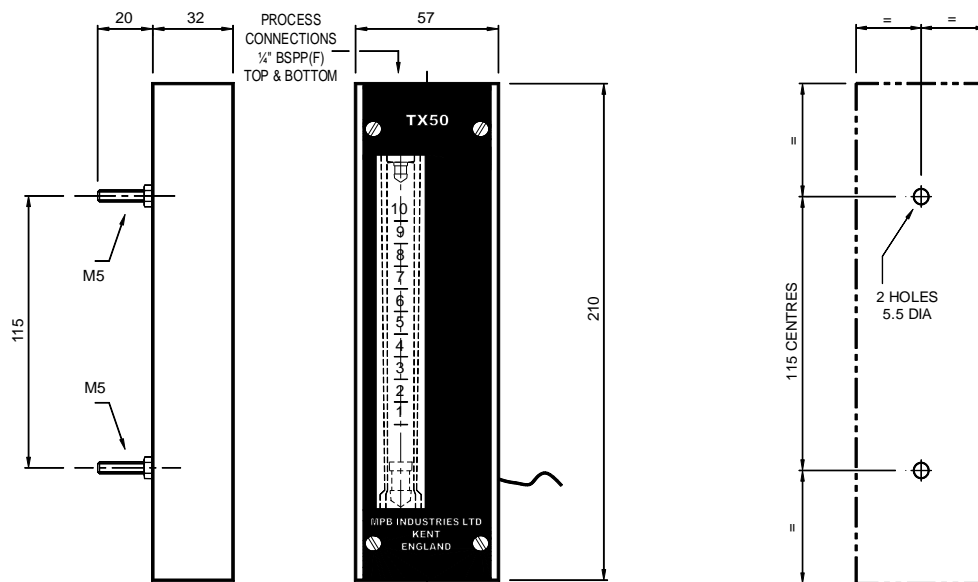

Designers and Manufacturers of Scientific and Process Control Instrumentation

Due to the constant development and improvement of products, information may be altered or withdrawn without notice.