

# HYDRUS

ULTRASONIC METER

**DIEHL**  
Metering



## APPLICATION

Highly accurate, lead-free brass ultrasonic smart water meter for residential, commercial and industrial installations.

## FEATURES

- ▶ Extreme low-flow accuracy and long term measurement stability
- ▶ Integrated leak detection
- ▶ Mountable in any installation position
- ▶ Lead-free copper alloy body
- ▶ IP68 rated
- ▶ 42 days of hourly data storage
- ▶ Diehl Extended Encoder protocol that includes temperature, alarms and error messages, etc.
- ▶ Meets or exceeds C715 AWWA/ANSI Standards
- ▶ Complies with NSF/ANSI Standards 61, Annex F/G as well as FCC part 15 B

# HYDRUS

## ULTRASONIC METER

### GENERAL TECHNICAL DATA

HYDRUS	
Potable water temperature	°F 33 ... 122
Ambient operating temperature	°F -13 ... 131
Ambient storage temperature	°F -13 ... 158 (90° F max. for one hour)
Maximum operating pressure	psi 300
Power supply	Two 3.6 VDC lithium batteries
Battery lifetime	Up to 20 years
Encoder interface	9 digit programmable resolution industry standard encoder protocol, ASCII output for compatibility with most AMR/AMI systems, Diehl extended protocol is available
Data storage	Alarms and consumption values (42 days of hourly data storage)
Protection class	IP68

### TECHNICAL DATA DISPLAY

HYDRUS	
Display indication	LCD, 9-digit, additional symbols/display counter/unit
Units	Flow and volume (gpm, gal, ft <sup>3</sup> , m <sup>3</sup> )
Values displayed	Display test - total volume - firmware version / checksum - current flow - errors / alarms (Additional values based on configuration)
Alarms	Hardware flow - leak detection - backflow - air in pipe - low battery - undersized meter - no consumption - high temperature - freezing risk

### APPROVAL

HYDRUS	
NSF	Complies with NSF/ANSI Standard 61, Annex F/G
AWWA	Meets or exceeds applicable sections of the AWWA/ANSI C715 Standards
FCC	Complies with FCC part 15 B

### MATERIAL

HYDRUS	
Measuring pipe	Lead-free copper alloy (stainless steel 1½" & 2")
Register housing	Engineered polymer
Transducers	Composite
Reflectors	Stainless steel

# HYDRUS

## ULTRASONIC METER


### TECHNICAL DATA

Size		5/8" x 1/2"	5/8" x 3/4"	3/4"S	3/4"
Lay length	inch	7 1/2	7 1/2	7 1/2	9
Operating flow range	gpm	0.08 - 22	0.08 - 22	0.1 - 32	0.1 - 32
Low flow range	gpm	0.025 - 0.08	0.025 - 0.08	0.04 - 0.1	0.04 - 0.1
Starting flow	gpm	0.011	0.011	0.017	0.017
Operating range accuracy	%	±1.5	±1.5	±1.5	±1.5
Low flow range accuracy	%	±5	±5	±5	±5
Pressure loss	psi	4.3@15 gpm	4.3@15 gpm	2.0@15 gpm	2.0@15 gpm

Size		1"	1 1/2"	2" *
Lay length	inch	10 3/4	13	17
Operating flow range	gpm	0.1 - 55	0.16 - 100	0.8 - 170
Low flow range	gpm	0.055 - 0.1	0.1 - 0.16	0.55 - 0.8
Starting flow	gpm	0.025	0.038	0.11
Operating range accuracy	%	±1.5	±1.5	±1.5
Low flow range accuracy	%	±5	±5	±5
Pressure loss	psi	1.5@25 gpm	3.5@70 gpm	3.6@110 gpm

\*Please contact Diehl Metering US for 2" availability.

### DIMENSIONS

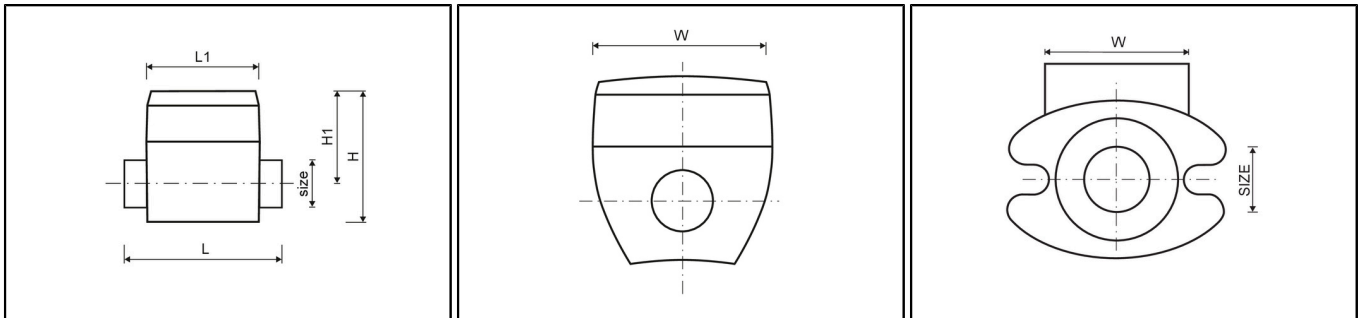

Size		5/8" x 1/2"	5/8" x 3/4"	3/4"S	3/4"
Lay length	inch	7 1/2	7 1/2	7 1/2	9
Register length	L1	inch	3.5	3.5	3.5
Register width	W	inch	3.7	3.7	3.7
Overall height	H	inch	4.0	4.0	4.0
Height from center of pipe to top	H1	inch	2.7	2.7	2.7
Nominal thread size		3/4" - 14 NPSM	1" - 11 1/2 NPSM	1" - 11 1/2 NPSM	1" - 11 1/2 NPSM
Net weight	lbs.	2.8	2.8	2.8	3.1

Size		1"	1 1/2"	2" *
Lay length	inch	10 3/4	13	17
Register length	L1	inch	3.5	3.5
Register width	W	inch	3.7	3.7
Overall height	H	inch	4.2	5.3
Height from center of pipe to top	H1	inch	2.8	3.3
Nominal thread size		1 1/4" - 11 1/2 NPSM	oval flanges	oval flanges
Net weight	lbs.	3.5	14.1	19.2

\*Please contact Diehl Metering US for 2" availability.