

HYDROGEN PRESSURE TRANSMITTER

Swiss based Trafag is a leading international supplier of high quality sensors and monitoring instruments for measurement of pressure and temperature. The NHT 8250 Hydrogen pressure transmitter features a thin-film-on-steel sensor based on a special hydrogen-compatible high-performance alloy for best-in-class signal stability. The robust mechanical design with fully welded housing is built to last in harsh environments.



Applications

- H₂ fuelling stations
- Hydrogen compressors
- Fuel cells
- Vehicles with H₂ drive
- Hydrogen tanks

Features

- EC79 and ECER-134 certification pending
- Wetted materials made of hydrogen-compatible steel
- Completely welded sensor system without additional seals
- Excellent long-term stability
- Optional: Switching output 1 or 2 PNP transistors

Technical Data			
Measuring principle	Thin-film-on-steel	Accuracy @ 25°C typ.	± 0.5 % FS typ.
Measuring range	0 ... 1 to 0 ... 250 bar 0 ... 15 to 0 ... 2000 psi	Media temperature	-40°C ... +85°C
Output signal	4 ... 20 mA, 0.5 ... 4.5 VDC, 0 ... 5 VDC, 1 ... 5 VDC, 1 ... 6 VDC, 0 ... 10 VDC, 0.1 ... 10.1 VDC, 0.5 ... 4.5 VDC ratiometric, Switching output: 1 or 2 PNP transistors	Ambient temperature	-40°C ... +85°C (Cable PVC 22: -5°C ... +60°C) (Cable PUR 24: -40°C ... +70°C)
NLH @ 25°C (BSL) typ.	± 0.2 % FS typ.		

02/2022

Data sheet H72338a

Subject to change

Ordering information/type code

							8250 . XX	XX	XX	XX	XX	XX
Measuring range ¹⁾	Pressure measurement range [bar]	Over pressure [bar]	Burst pressure [bar]		Pressure measurement range [psi]	Over pressure [psi]	Burst pressure [psi]					
	0 ... 1	2	25	71	0 ... 15	30	350	G1				
	0 ... 1.6	3.2	32	73	0 ... 30	60	700	G5				
	0 ... 2.5	5	50	75	0 ... 50	100	850	G6				
	0 ... 4	8	60	76	0 ... 100	200	1450	G7				
	0 ... 6	12	100	77	0 ... 150	300	2500	G8				
	0 ... 10	20	200	78	0 ... 200	400	2500	GA				
	0 ... 16	32	200	79	0 ... 250	500	2500	G9				
	0 ... 25	38	300	80	0 ... 300	600	4000	HA				
	0 ... 40	60	300	81	0 ... 400	600	4000	H0				
	0 ... 60	90	400	82	0 ... 500	750	4000	H1				
	0 ... 100	150	500	83	0 ... 1000	1500	5000	H2				
	0 ... 160	240	750	85	0 ... 1500	2250	7000	H3				
	0 ... 250	375	1000	74	0 ... 2000	3000	10000	H5				
					0 ... 3000	4500	14500	G4				
Sensor	Relative pressure, accuracy: 0.3 %			33	Relative pressure, accuracy: 0.5 %			35				
Pressure connection	G1/4" male, seal: DIN 3869 (accessories 61/63/83)											17
	1/4" NPT male											30
	1/8" NPT male											43
	7/16"-20UNF SAE4 male, seal: accessory 61											42
Electrical connection	Male electrical plug, industrial standard, contact distance 9.4 mm, Mat. PA											01
	Male electrical plug M12x1, 4-pole, Mat. PA, IEC 61076-2-101											32
	Male electrical plug M12x1, 5-pole, Mat. PA, IEC 61076-2-101											35
	Male electrical connector MIL-C 26482, 6-pole, metal											02
	Male electrical connector Deutsch DT04-3P, 3-pole											D3
	Male electrical connector Deutsch DT04-4P, 4-pole											D4
	Cable IP67, Mat. PVC ³⁾											22
	Cable IP67, Mat. PUR ³⁾											24
	Cable IP67, Mat. EPD Raychem FDR25 ³⁾											08
Output signal	Signal output	Load resistance	I (supply)		U (supply)							
	4 ... 20 mA	See graphic			24 (9 ... 32) VDC		19					
	0.5 ... 4.5 VDC	≥ 5.0 kΩ to Us-	≤ 20 mA		24 (9 ... 32) VDC		20					
	0 ... 5 VDC	≥ 5.0 kΩ to Us-	≤ 20 mA		24 (9 ... 32) VDC		14					
	0.1 ... 4.1 VDC	≥ 5.0 kΩ to Us-	≤ 20 mA		24 (9 ... 32) VDC		28					
	0.1 ... 5.1 VDC	≥ 5.0 kΩ to Us-	≤ 20 mA		24 (9 ... 32) VDC		29					
	0.5 ... 5 VDC	≥ 5.0 kΩ to Us-	≤ 20 mA		24 (9 ... 32) VDC		22					
	1 ... 5 VDC	≥ 5.0 kΩ to Us-	≤ 20 mA		24 (9 ... 32) VDC		25					
	0.5 ... 5.5 VDC	≥ 5.0 kΩ to Us-	≤ 20 mA		24 (9 ... 32) VDC		24					
	1 ... 6 VDC	≥ 5.0 kΩ to Us-	≤ 20 mA		24 (9 ... 32) VDC		16					
	0 ... 10 VDC	≥ 5.0 kΩ to Us-	≤ 15 mA		24 (15 ... 32) VDC		17					
	1 ... 10 VDC	≥ 5.0 kΩ to Us-	≤ 15 mA		24 (15 ... 32) VDC		26					
	0.1 ... 10.1 VDC	≥ 5.0 kΩ to Us-	≤ 15 mA		24 (15 ... 32) VDC		13					
	0.5 ... 4.5 VDC ratiometric	≥ 5.0 kΩ to Us-	≤ 10 mA		5 (4.75 ... 5.25) VDC		23					
	2 PNP transistors ⁴⁾		≤ 10 mA		24 (9 ... 32) VDC		PS					
	1 PNP transistor ⁴⁾		≤ 10 mA		24 (9 ... 32) VDC		T1					

Accessories		
Female electrical plug M12x1, 5-pole ²⁾		33
Female electrical plug industrial standard (for electrical connection 01)		34
Seal FPM, -18°C ... +125°C		61
Seal EPDM, -40°C ... +125°C		63
Seal NBR, -25°C ... +100°C		83
Special electrical connection: Pin 2 +, Pin 3 Ground, Pin 4 - (only for output signal 19 and male electrical connector 01, industrial standard)		90
Special electrical connection: Pin 1 Out, Pin 2 +, Pin 3 Ground, Pin 4 - (only for output signals 13, 14, 16, 17, 20, 22, 23, 24, 25, 26 and male electrical connector 01, industrial standard)		91
Special electrical connection: Pin 1 +, Pin 2 Ground, Pin 3 Out, Pin 4 - (only for output signals 13, 14, 16, 17, 20, 22, 23, 24, 25, 26, 28, 29 and male electrical connector 32, M12x1, 4-pole)		95
Special electrical connection: Pin 1 +, Pin 2 Ground, Pin 3 -, Pin 4 Out (only for output signals 13, 14, 16, 17, 20, 22, 23, 24, 25, 26 and male electrical connector 32, M12x1, 4-pole)		96
Special electrical connection: Pin 1 +, Pin 3 -, Pin 4 Out (only for output signals 13, 14, 16, 17, 20, 22, 23, 24, 25, 26, 28, 29 and male electrical connector 32, M12x1, 4-pole)		G1
Special electrical connection: Pin 1 +, Pin 2 -, Pin 4 Ground (only for output signal 19 and male electrical connector 01, industrial standard)		92
Special electrical connection: Pin 1 +, Pin 2 -, Pin 4 Ground (only for output signal 19 and male electrical connector 32, M12x1, 4-pole)		E1
Special electrical connection: Pin 1 +, Pin 2 -, Pin 3 Out, Pin 4 Ground (only for output signals 13, 14, 16, 17, 20, 22, 23, 24, 25, 26 and male electrical connector 32, M12x1, 4-pole)		E2
Special electrical connection: Pin 1 Out, Pin 2 -, Pin 3 +, Pin 4 Ground (only for output signals 13, 14, 16, 17, 20, 22, 23, 24, 25, 26, 28, 29 and male electrical connector 01, industrial standard)		E3
Special electrical connection: Pin 1 +, Pin 2 -, Pin 3 Out, Pin 4 Ground (only for output signals 13, 14, 16, 17, 20, 22, 23, 24, 25, 26, 28, 29 and male electrical connector 01, industrial standard)		E9
Special electrical connection: Pin 1 +, Pin 2 Ground, Pin 4 - (only for output signal 19 and male electrical connector 32, M12x1, 4-pole)		E6
Special electrical connection: Pin A +, Pin C - (only for output signal 19 and male electrical connector Deutsch DT04-3P, 3-pole)		F0
Special electrical connection: Pin A +, Pin B Out, Pin C - (only for output signals 13, 14, 16, 17, 20, 22, 23, 24, 25, 26, 28, 29 and male electrical connector Deutsch DT04-3P, 3-pole)		F1
Special electrical connection: Pin A +, Pin C Out, Pin B/D -, Pin E Ground (Pin B and D are connected) (only for output signals 13, 14, 16, 17, 20, 22, 23, 24, 25, 26, 28, 29 and male electrical connector 02, MIL-C 26482)		F3
Special electrical connection: Pin 1 +, Pin 2 - (only for output signal 19 and male electrical connector 32, M12x1, 4-pole)		F4
Special electrical connection: Pin 1 +, Pin 3 - (only for output signal 19 and male electrical connector 32, M12x1, 4-pole)		F5
Special electrical connection: Pin 1 -, Pin 2 +, Pin 3 +, Pin 4 Ground (only for output signals 19 and male electrical connector 32, M12x1, 4-pole)		G2
Special electrical connection: Pin 1 +, Pin 2 Out, Pin 3 Ground, Pin 4 - (only for output signals 13, 14, 16, 17, 20, 22, 23, 24, 25, 26, 28, 29 and male electrical connector 32, M12x1, 4-pole)		F6
Special electrical connection: Pin 1 +, Pin 2 Out, Pin 3 - (only for output signals 13, 14, 16, 17, 20, 22, 23, 24, 25, 26, 28, 29 and male electrical connector 32, M12x1, 4-pole)		F7
Cable length 0.5 m		EM
Cable length 1.0 m		1M
Cable length 2.0 m		2M
Parameterization according to customer specification for output signal PS, T1 (see table "Parameters")		ZC
Parameterization standard for output signal PS, T1 (see table "Parameters")		ZS
Multiple packaging ⁵⁾		VM

¹⁾ Customized pressure ranges upon request

²⁾ For electrical connections 32 and 35

³⁾ Cable length see accessories

⁴⁾ Only with electrical connections 32, 22, 24, 08

⁵⁾ The order quantity must be a multiple of 50

Parameters				
Name	Standard setting (accessory ZS)	Value range	Short name	Customer adjustment (accessory ZC)
Switch point SP1 (hysteresis mode) Upper switch point FH1 (window mode)	75 % Measuring range	> RP1, FL1 Hysteresis ≥ 1 % FS	SP1	
Reset point RP1 (hysteresis mode) Lower switch point FL1 (window mode)	25 % Measuring range	< SP1, FH1 Hysteresis ≥ 1 % FS	RP1	
Switch point SP2 (hysteresis mode) Upper switch point FH2 (window mode)	75 % Measuring range	> RP2, FL2 Hysteresis ≥ 1 % FS	SP2	
Reset point RP2 (hysteresis mode) Lower switch point FL2 (window mode)	25 % Measuring range	< SP2, FH2 Hysteresis ≥ 1 % FS	RP2	
Switch point delay time SP1 / RP1 (hysteresis mode) Switch point delay time FH1 / FL1 (window mode)	0	0; 2^x [ms], x = 3, 4 ... 16	dS1	
Switch point delay time SP2 / RP2 (hysteresis mode) Switch point delay time FH2 / FL2 (window mode)	0	0; 2^x [ms], x = 3, 4 ... 16	dS2	
Functions switching output 1	Hysteresis, closer (Hno)	Hysteresis NO (Hno), Hysteresis NC (Hnc) Window NO (Fno), Window NC (Fnc)	ou1	
Functions switching output 2	Hysteresis, closer (Hno)	Hysteresis NO (Hno), Hysteresis NC (Hnc) Window NO (Fno), Window NC (Fnc) Device ready	ou2	

i Parameterization of switching points

The switching points, delay times and output functions can be parameterized via Smartphone app (Android). The SMI Sensor Master Interface required for the parameterization as well as the Smartphone are not part of the delivery. The Android App is available for free in the Google Play Store.

- Ordering No. SMI Sensor Master Interface: F90170
- Data sheet SMI Sensor Master Interface: H72618



Specifications		
Electrical data	Output / supply voltage	4 ... 20 mA: 24 (9...32) VDC 0.5 ... 4.5 VDC: 24 (9...32) VDC 0 ... 5 VDC: 24 (9...32) VDC 1 ... 5 VDC: 24 (9...32) VDC 1 ... 6 VDC: 24 (9...32) VDC 0 ... 10 VDC: 24 (15...32) VDC 0.1 ... 10.1 VDC: 24 (15...32) VDC 0.5 ... 4.5 VDC ratiom., 10 ... 90% U_{supply} : 5 ± 0.25 VDC 1 or 2 PNP transistors: 24 (9...32) VDC
	Rise time	Typ. 1 ms / 10 ... 90 % nominal pressure
	Power-on delay time pressure transmitters	100 ms
	Power-on delay time pressure switches	50 ms + switching delay time
	Inverse-polarity protection, short-circuit strength @ 25°C during 5 min.	4...20 mA: to $U_s = 32$ VDC 0.5...4.5 VDC, 0...5 VDC, 1...5 VDC, 1...6 VDC, 0...10 VDC, 0.1...10.1 VDC: to $U_s = 28$ VDC 0.5...4.5 VDC ratiometric: to $U_s = 14$ VDC 1 or 2 PNP transistors: to $U_s = 32$ VDC
Environmental conditions	Media temperature	-40°C ... +85°C
	Ambient temperature	-40°C ... +85°C (Cable PVC 22: -5°C ... +60°C) (Cable PUR 24: -40°C ... +70°C)
	Protection ¹⁾	IP65, IP67
	Humidity	Max. 95 % relative
	Vibration	15 g RMS (20...2000 Hz) (EN60068-2-64) 25 g sin (80...2000 Hz), 1 oct./min, (1x @ 25°C) (EN60068-2-6)
	Shock	50 g / 11 ms 100 g / 6 ms Male electrical plug M12x1 (EN60068-2-27) ²⁾
EMC protection	Emission	EN/IEC 61000-6-3
	Immunity	EN/IEC 61000-6-2
Mechanical data	Sensor (wetted parts)	Nitrogen-strengthened austenitic steel, hydrogen compatible
	Pressure connection (wetted parts)	1.4404 (AISI316L)
	Housing	1.4301 (AISI304)
	Sealing	FPM/EPDM/NBR
	Male electrical connector	See ordering information
	Weight	appr. 50 g
	Mounting torque	25 Nm

¹⁾ See electrical connection

²⁾ For electrical connections 32 and 35


Analogue output

			Sensor 35 accuracy 0.5 %	Sensor 33 accuracy 0.3 %
Accuracy	TEB @ -25 ... +85°C	[% FS typ.]	± 1.75	± 1.0
	Accuracy @ +25°C	[% FS typ.]	± 0.5	± 0.3
	NLH @ +25°C (BSL)	[% FS typ.]	± 0.2	± 0.2
	TC zero point and span	[% FS/K typ.]	± 0.03	± 0.01
	Long term stability 1 year @ +25°C	[% FS typ.]	± 0.75	± 0.75
Rise time	Typ. 1 ms / 10 ... 90 % nominal pressure			


Switching output

			Sensor 35 accuracy 0.5 %	Sensor 33 accuracy 0.3 %
Accuracy	TEB @ -25 ... +85°C	[% FS typ.]	± 1.75	± 1.0
	Accuracy @ +25°C	[% FS typ.]	± 0.5	± 0.3
	Long term stability 1 year @ +25°C	[% FS typ.]	± 0.75	± 0.75
Setting range of switchpoints	1 ... 99 % FS			
Distance switch point Switch point > reset point	≥ 1.0 % FS Switchpoint > reset point			
Switching resistance	≤ 3 Ω			
Output function	Hysteresis, Window; normally closed (NO), normally open (NC)			
Switching current	-40°C ... +85°C +85°C ... +125°C	(Ambient and media temperature)	≤ 400 mA, total of both switching outputs	
Current limiting	integrated			
Lifetime	>100 x 10 ⁶ cycles			
Delay time	0; 2 ^x [ms], x = 3, 4 ... 16			
Switching frequency	max. 60 Hz (at switching delay time = 0)			


Measuring accuracy 0.5 %

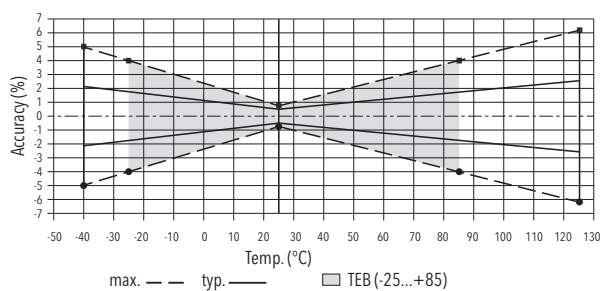


Measuring accuracy 0.3 %

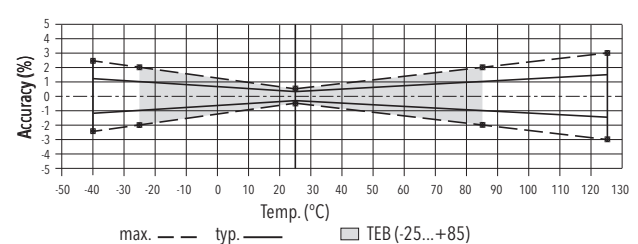


Dimensions

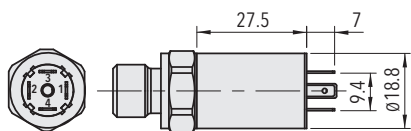


8250.XX.XXXX.01.XX.XX

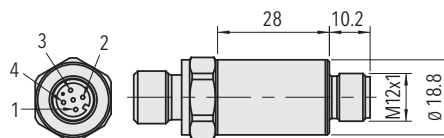


8250.XX.XXXX.32.XX.XX

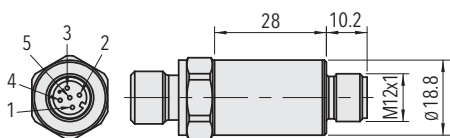


8250.XX.XXXX.35.XX.XX

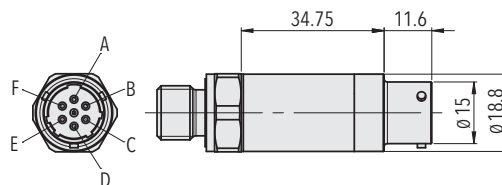


8250.XX.XXXX.02.XX.XX




8250.XX.XXXX.D3.XX.XX




8250.XX.XXXX.D4.XX.XX

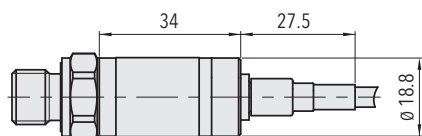


8250.XX.XXXX.22/24/08.XX.XX




8250.XX.XX17.XX.XX.XX




8250.XX.XX30.XX.XX.XX




8250.XX.XX43.XX.XX.XX



8250.XX.XX42.XX.XX.XX



8250.XX.XXXX.XX.XX.33



8250.XX.XXXX.XX.XX.34

Elektrischer Anschluss



		Schutzart / Elektrischer Anschluss													
		IP65 ^{1) 2)}		IP67 ^{1) 2)}						IP67 ^{1) 2)}		IP67, IP68 ^{1) 4)}		IP67, IP68 ^{1) 4)}	
		Industriestandard Kontaktdistanz 9.4 mm		M12x1						MIL-C 26482		DT04-3P 3-polig		DT04-4P 4-polig	
		01		4-polig 32			5-polig 35			02		D3		D4	
Ausgangssignal	<p>8250.xx.xxxx.xx.19</p>	90	92	E1	E6	F4	F5	G2				F0			
		2	2	1	1	1	1	1	2/3	4	A	A	A	2	
		1	4	2	3	2	4	2	3	1	B	B	C	1	
		4	3	4	4	4	2		4	5	E			3	
Ausgangssignal	<p>8250.xx.xxxx.xx.13/14/16/17/20/22/ 23/24/25/26/28/29</p>	91	E3	E9	95	96	E2	F6	F7	G1		F3		F1	
		1	2	3	1	1	1	1	1	1	2	A	A	A	2
		2	1	1	3	2	3	4	3	2	4	B	C	C	4
		3	4	2	2	3	4	3	2	4	3	C/D	B/D	B	1
		4	3	4	4	4	2	2	4	3	5	E	E	C	3

		Protection / electrical connection					
		IP67 ^{*) (**)}		IP67 ^{**)}		IP67 ^{**)}	
		M12x1 4-pole		Cable		Cable	
		32		22/24		08	
Output signal	<p>8250.xx.xxxx.xx.PS/T1</p>	PS	T1	PS	T1	PS	T1
		1	1	white	white	red	red
		4	4	green	green	white	white
		2	-	yellow	-	green	-
		3	3	brown	brown	black	black

*) Nur mit vorschriftsmässig montierter Kabeldose gültig


**) Entlüftung über Stecker/Kabel

4...20mA: min./max resistor vs. supply voltage @ Pmax = 100%

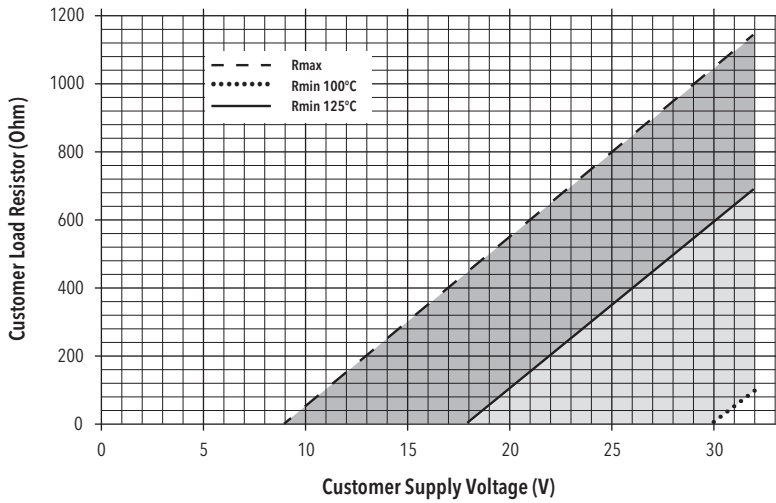

Connection of loads to switching contacts

Functions switching output

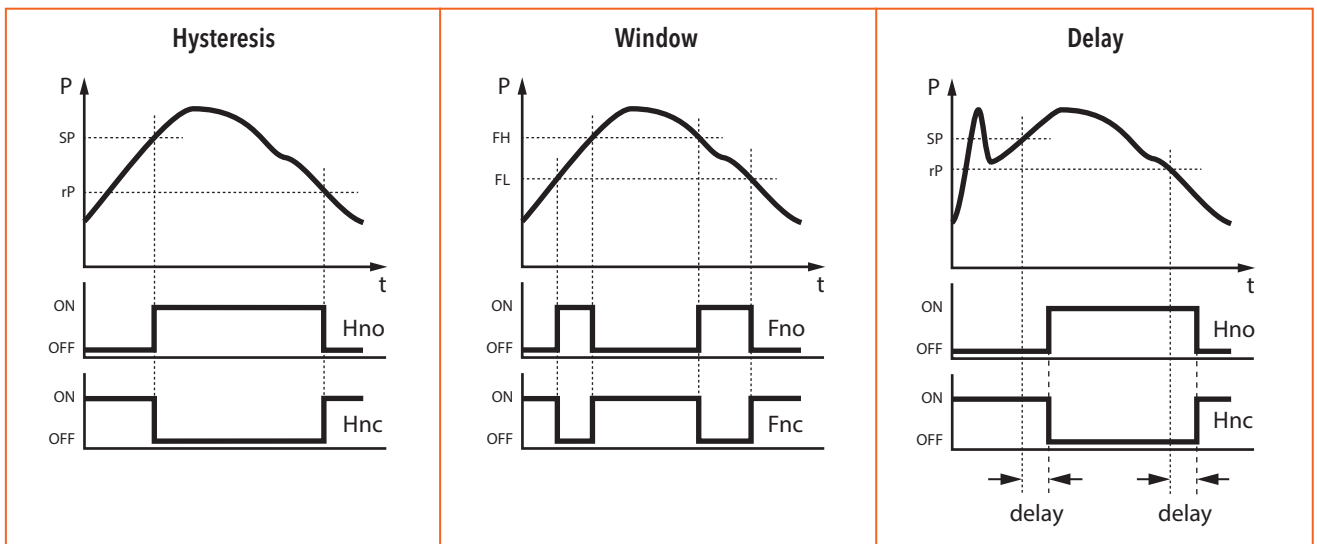

Additional information

Documents

Data sheet	www.trafag.com/H72338
Instructions	www.trafag.com/H73303
Flyer	www.trafag.com/H70606