


V-Shape Glass Engine Thermometers, Form B, G 1/2, 200 x 36, 90° Angle

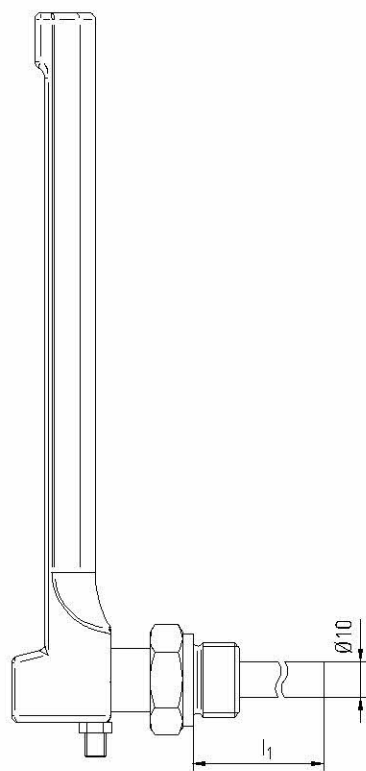

Complete instruments acc. to DIN 16186,

90° angle, for insertion

Case: 200 x 36 mm, aluminum brass-colored,

Threading: G 1/2, Stem: dia. 10 mm


Scale lettering: black

Capillary: white back prismatic, blue filling ($\leq +200\text{ °C}$)

yellow back prismatic, Hg filling ($> +200\text{ °C}$)

Accuracy: 1% of scale value

Measuring range °C	Scale division °C	Order numbers						
		Built-in length l_1 (mm)						
		$l_1 = 40$	$l_1 = 50$	$l_1 = 63$	$l_1 = 100$	$l_1 = 160$	$l_1 = 250$	$l_1 = 400$
-60 +40	1	1680102	1680103	1680104	1680107	1680110	1680112	1680114
-30 +50	1	1680202	1680203	1680204	1680207	1680210	1680212	1680214
0 +60	1	1680252	1680253	1680254	1680257	1680260	1680262	1680264
0 +100	1	1680302	1680303	1680304	1680307	1680310	1680312	1680314
0 +120	1	1680352	1680353	1680354	1680357	1680360	1680362	1680364
0 +160	2	1680402	1680403	1680404	1680407	1680410	1680412	1680414
0 +200	2	1680452	1680453	1680454	1680457	1680460	1680462	1680464
0 +300	2	1680552	1680553	1680554	1680557	1680560	1680562	1680564
0 +400	5	1680652	1680653	1680654	1680657	1680660	1680662	1680664
0 +500	5	1680702	1680703	1680704	1680707	1680710	1680712	1680714
0 +600	5	1680752	1680753	1680754	1680757	1680760	1680762	1680764

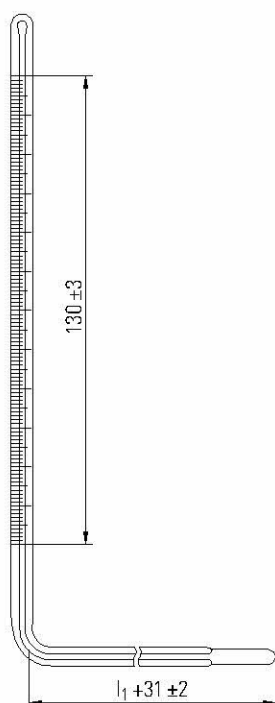

Spare capillaries acc. to DIN 16195

Measuring range °C	Scale division °C	Order numbers						
		Built-in length l_1 (mm)						
		$l_1 = 40$	$l_1 = 50$	$l_1 = 63$	$l_1 = 100$	$l_1 = 160$	$l_1 = 250$	$l_1 = 400$
-60 +40	1	1694102	1694103	1694104	1694107	1694110	1694112	1694114
-30 +50	1	1694202	1694203	1694204	1694207	1694210	1694212	1694214
0 +60	1	1694252	1694253	1694254	1694257	1694260	1694262	1694264
0 +100	1	1694302	1694303	1694304	1694307	1694310	1694312	1694314
0 +120	1	1694352	1694353	1694354	1694357	1694360	1694362	1694364
0 +160	2	1694402	1694403	1694404	1694407	1694410	1694412	1694414
0 +200	2	1694452	1694453	1694454	1694457	1694460	1694462	1694464
0 +300	2	1694552	1694553	1694554	1694557	1694560	1694562	1694564
0 +400	5	1694652	1694653	1694654	1694657	1694660	1694662	1694664
0 +500	5	1694702	1694703	1694704	1694707	1694710	1694712	1694714
0 +600	5	1694752	1694753	1694754	1694757	1694760	1694762	1694764

Note for ordering:

When ordering standard types use the order numbers in the tables. For further options see page 5 "Options".